

# STUDIO L PRO


“The STUDIO family offers thanks to the side-by-side design solution a range of spotlights that can be used in places where size is critical, e.g. where ceiling height is limited or in environments where you want the luminaire to be visually discreet. Developed and produced in Sweden”.

LED-spotlight with passive cooling system.  
Die cast aluminium body, powder coat painted.  
Integral heatsink. Integral premium driver.  
Low ripple output current <4% to assure camera and scanner friendly performance.  
Rotation 365°. Vertical adjustment +/- 90°.  
Track mounted with 3-circuit adaptor.




<b>Class of protection</b>	IP20, class I
<b>Colours</b>	White, black
<b>Weight total</b>	1010g
<b>Reflector</b>	High purity aluminium
<b>Lifetime</b>	50.000h L80/B10 at Ta 25°C
<b>Mounting</b>	3-circuit universal adaptor
<b>Voltage</b>	220-240V 50/60hz
<b>Ripple out. current</b>	< 4%. Flicker-free performance
<b>Colour consistency</b>	3 SDCM
<b>Photobiological safety</b>	RG1
<b>Qty per MCB</b>	Max 24pcs / MCB 16A type B
<b>Design</b>	Jesper Ståhl
<b>Dimming</b>	Not dimmable

- White
- Black



## Accessories

Protective glass	204090
------------------	--------

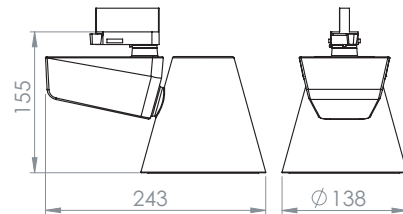

# STUDIO L PRO

Description	Reflector	CCT (K)	CRI	Load	Lumen	Load	Lumen	Lm/W	○ White	● Black																																																																																																																																								
LIGHTSOURCE						LUMINAIRE			ART. No.																																																																																																																																									
WARM WHITE 3000K (830)																																																																																																																																																		
STUDIO L Pro 3500lm SP 830	Spot 14°	3000K	82	23W	3450	27W	3070	113	235300	235304																																																																																																																																								
STUDIO L Pro 3500lm ME 830	Medium 26°	3000K	82	23W	3450	27W	3070	113	235301	235305																																																																																																																																								
STUDIO L Pro 3500lm FL 830	Flood 40°	3000K	82	23W	3450	27W	3070	113	235302	235306																																																																																																																																								
STUDIO L Pro 4500lm SP 830	Spot 14°	3000K	82	34W	4710	39W	4190	107	235400	235404																																																																																																																																								
STUDIO L Pro 4500lm ME 830	Medium 26°	3000K	82	34W	4710	39W	4190	107	235401	235405																																																																																																																																								
STUDIO L Pro 4500lm FL 830	Flood 40°	3000K	82	34W	4710	39W	4190	107	235402	235406																																																																																																																																								
<table border="1"> <thead> <tr> <th colspan="2">Spot</th> <th colspan="2">3500lm</th> <th colspan="2">4500lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,26</td><td>21009</td><td>28488</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>0,52</td><td>5252</td><td>7122</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>0,80</td><td>2334</td><td>3165</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>1,05</td><td>1313</td><td>1781</td><td></td><td></td><td></td><td></td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">Medium</th> <th colspan="2">3500lm</th> <th colspan="2">4500lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,46</td><td>10979</td><td>14923</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>0,92</td><td>2745</td><td>3731</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>1,37</td><td>1220</td><td>1658</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>1,85</td><td>686</td><td>933</td><td></td><td></td><td></td><td></td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">Flood</th> <th colspan="2">3500lm</th> <th colspan="2">4500lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,70</td><td>6176</td><td>8375</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>1,40</td><td>1544</td><td>2094</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>2,05</td><td>686</td><td>931</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>2,80</td><td>386</td><td>523</td><td></td><td></td><td></td><td></td></tr> </tbody> </table>						Spot		3500lm		4500lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,26	21009	28488					2	0,52	5252	7122					3	0,80	2334	3165					4	1,05	1313	1781					Medium		3500lm		4500lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,46	10979	14923					2	0,92	2745	3731					3	1,37	1220	1658					4	1,85	686	933					Flood		3500lm		4500lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,70	6176	8375					2	1,40	1544	2094					3	2,05	686	931					4	2,80	386	523					<p>3000K 830 Spectral power distributions</p>		
Spot		3500lm		4500lm																																																																																																																																														
m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																																											
1	0,26	21009	28488																																																																																																																																															
2	0,52	5252	7122																																																																																																																																															
3	0,80	2334	3165																																																																																																																																															
4	1,05	1313	1781																																																																																																																																															
Medium		3500lm		4500lm																																																																																																																																														
m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																																											
1	0,46	10979	14923																																																																																																																																															
2	0,92	2745	3731																																																																																																																																															
3	1,37	1220	1658																																																																																																																																															
4	1,85	686	933																																																																																																																																															
Flood		3500lm		4500lm																																																																																																																																														
m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																																											
1	0,70	6176	8375																																																																																																																																															
2	1,40	1544	2094																																																																																																																																															
3	2,05	686	931																																																																																																																																															
4	2,80	386	523																																																																																																																																															
WARM WHITE 3000K (930)																																																																																																																																																		
STUDIO L Pro 3500lm SP 930	Spot 14°	3000K	92	30W	3640	35W	3245	93	235310	235314																																																																																																																																								
STUDIO L Pro 3500lm ME 930	Medium 26°	3000K	92	30W	3640	35W	3245	93	235311	235315																																																																																																																																								
STUDIO L Pro 3500lm FL 930	Flood 40°	3000K	92	30W	3640	35W	3245	93	235312	235316																																																																																																																																								
<table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,26</td><td>22063</td><td>1</td><td>0,46</td><td>11549</td><td>1</td><td>0,70</td><td>6474</td></tr> <tr><td>2</td><td>0,52</td><td>5516</td><td>2</td><td>0,92</td><td>2887</td><td>2</td><td>1,40</td><td>1619</td></tr> <tr><td>3</td><td>0,80</td><td>2451</td><td>3</td><td>1,37</td><td>1283</td><td>3</td><td>2,05</td><td>719</td></tr> <tr><td>4</td><td>1,05</td><td>1379</td><td>4</td><td>1,85</td><td>722</td><td>4</td><td>2,80</td><td>405</td></tr> </tbody> </table>						Spot 14°			Medium 26°			Flood 40°			m	Ø	Lux	m	Ø	Lux	m	Ø	Lux	1	0,26	22063	1	0,46	11549	1	0,70	6474	2	0,52	5516	2	0,92	2887	2	1,40	1619	3	0,80	2451	3	1,37	1283	3	2,05	719	4	1,05	1379	4	1,85	722	4	2,80	405	<p>3000K 930 Spectral power distributions</p>																																																																																						
Spot 14°			Medium 26°			Flood 40°																																																																																																																																												
m	Ø	Lux	m	Ø	Lux	m	Ø	Lux																																																																																																																																										
1	0,26	22063	1	0,46	11549	1	0,70	6474																																																																																																																																										
2	0,52	5516	2	0,92	2887	2	1,40	1619																																																																																																																																										
3	0,80	2451	3	1,37	1283	3	2,05	719																																																																																																																																										
4	1,05	1379	4	1,85	722	4	2,80	405																																																																																																																																										
NEUTRAL WHITE 4000K (840)																																																																																																																																																		
STUDIO L Pro 3500lm SP 840	Spot 14°	4000K	82	23W	3390	27W	3020	113	235340	235344																																																																																																																																								
STUDIO L Pro 3500lm ME 840	Medium 26°	4000K	82	23W	3390	27W	3020	113	235341	235345																																																																																																																																								
STUDIO L Pro 3500lm FL 840	Flood 40°	4000K	82	23W	3390	27W	3020	113	235342	235346																																																																																																																																								
STUDIO L Pro 4500lm SP 840	Spot 14°	4000K	82	34W	4970	39W	4410	112	235440	235444																																																																																																																																								
STUDIO L Pro 4500lm ME 840	Medium 26°	4000K	82	34W	4970	39W	4410	112	235441	235445																																																																																																																																								
STUDIO L Pro 4500lm FL 840	Flood 40°	4000K	82	34W	4970	39W	4410	112	235442	235446																																																																																																																																								
<table border="1"> <thead> <tr> <th colspan="2">Spot</th> <th colspan="2">3500lm</th> <th colspan="2">4500lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,26</td><td>22029</td><td>29957</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>0,52</td><td>5507</td><td>7489</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>0,80</td><td>2448</td><td>3329</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>1,05</td><td>1377</td><td>1872</td><td></td><td></td><td></td><td></td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">Medium</th> <th colspan="2">3500lm</th> <th colspan="2">4500lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,46</td><td>11540</td><td>15714</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>0,92</td><td>2885</td><td>3929</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>1,37</td><td>1282</td><td>1746</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>1,85</td><td>721</td><td>982</td><td></td><td></td><td></td><td></td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">Flood</th> <th colspan="2">3500lm</th> <th colspan="2">4500lm</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,70</td><td>6492</td><td>8831</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>1,40</td><td>1623</td><td>2208</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>2,05</td><td>721</td><td>981</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>2,80</td><td>406</td><td>552</td><td></td><td></td><td></td><td></td></tr> </tbody> </table>						Spot		3500lm		4500lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,26	22029	29957					2	0,52	5507	7489					3	0,80	2448	3329					4	1,05	1377	1872					Medium		3500lm		4500lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,46	11540	15714					2	0,92	2885	3929					3	1,37	1282	1746					4	1,85	721	982					Flood		3500lm		4500lm		m	Ø	Lux	Lux	m	Ø	Lux	Lux	1	0,70	6492	8831					2	1,40	1623	2208					3	2,05	721	981					4	2,80	406	552					<p>4000K 840 Spectral power distributions</p>		
Spot		3500lm		4500lm																																																																																																																																														
m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																																											
1	0,26	22029	29957																																																																																																																																															
2	0,52	5507	7489																																																																																																																																															
3	0,80	2448	3329																																																																																																																																															
4	1,05	1377	1872																																																																																																																																															
Medium		3500lm		4500lm																																																																																																																																														
m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																																											
1	0,46	11540	15714																																																																																																																																															
2	0,92	2885	3929																																																																																																																																															
3	1,37	1282	1746																																																																																																																																															
4	1,85	721	982																																																																																																																																															
Flood		3500lm		4500lm																																																																																																																																														
m	Ø	Lux	Lux	m	Ø	Lux	Lux																																																																																																																																											
1	0,70	6492	8831																																																																																																																																															
2	1,40	1623	2208																																																																																																																																															
3	2,05	721	981																																																																																																																																															
4	2,80	406	552																																																																																																																																															
NEUTRAL WHITE 4000K (940)																																																																																																																																																		
STUDIO L Pro 3500lm SP 940	Spot 14°	4000K	92	30W	3905	35W	3470	100	235350	235354																																																																																																																																								
STUDIO L Pro 3500lm ME 940	Medium 26°	4000K	92	30W	3905	35W	3470	100	235351	235355																																																																																																																																								
STUDIO L Pro 3500lm FL 940	Flood 40°	4000K	92	30W	3905	35W	3470	100	235352	235356																																																																																																																																								
<table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>Ø</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> <th>m</th> <th>Ø</th> <th>Lux</th> </tr> </thead> <tbody> <tr><td>1</td><td>0,26</td><td>23641</td><td>1</td><td>0,46</td><td>12404</td><td>1</td><td>0,70</td><td>6972</td></tr> <tr><td>2</td><td>0,52</td><td>5910</td><td>2</td><td>0,92</td><td>3101</td><td>2</td><td>1,40</td><td>1743</td></tr> <tr><td>3</td><td>0,80</td><td>2627</td><td>3</td><td>1,37</td><td>1378</td><td>3</td><td>2,05</td><td>775</td></tr> <tr><td>4</td><td>1,05</td><td>1478</td><td>4</td><td>1,85</td><td>775</td><td>4</td><td>2,80</td><td>436</td></tr> </tbody> </table>						Spot 14°			Medium 26°			Flood 40°			m	Ø	Lux	m	Ø	Lux	m	Ø	Lux	1	0,26	23641	1	0,46	12404	1	0,70	6972	2	0,52	5910	2	0,92	3101	2	1,40	1743	3	0,80	2627	3	1,37	1378	3	2,05	775	4	1,05	1478	4	1,85	775	4	2,80	436	<p>4000K 940 Spectral power distributions</p>																																																																																						
Spot 14°			Medium 26°			Flood 40°																																																																																																																																												
m	Ø	Lux	m	Ø	Lux	m	Ø	Lux																																																																																																																																										
1	0,26	23641	1	0,46	12404	1	0,70	6972																																																																																																																																										
2	0,52	5910	2	0,92	3101	2	1,40	1743																																																																																																																																										
3	0,80	2627	3	1,37	1378	3	2,05	775																																																																																																																																										
4	1,05	1478	4	1,85	775	4	2,80	436																																																																																																																																										

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of colour temperature: +/-150 K. Tolerance of CRI +/- 1,5. Values apply to an ambient temperature of 25°C.