


VINCI L PRO

"The all new Vinci LED Spotlights is designed for professional retail lighting. The characteristic and unique design of the heat sink is created for modern needs and preferences for a flexible solution. Vinci is available in black and white finish and with a set of accessories. Developed and produced in Sweden".


LED-spotlight with passive cooling system.
Die cast aluminium body, powder coat painted.
Integral electronic driver. Integral heatsink.
Rotation 365°. Vertical adjustment +/- 90°.
Track mounted with 3-circuit adaptor.



Class of protection	IP20, class I
Colours	White, black
Weight total	2700g
Reflector	High purity aluminium
Lifetime	50.000h L80/B10 at Ta 25°C
Mounting	3-circuit universal adaptor
Voltage	220-240V 50-60Hz
Ripple out. current	< 4%. Flicker-free performance
Qty per MCB	Max 34pcs/MCB 16A type B
Colour consistency	3 SDCM
Photobiological safety	RG1
Design	Jesper Ståhl
Dimming	Not dimmable

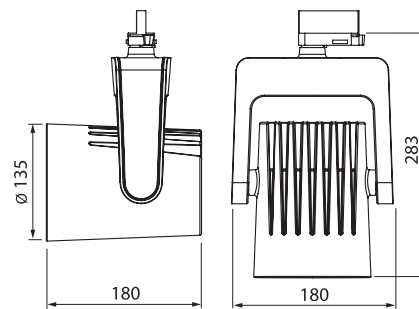

- White
- Black



Accessories

Protective glass	204090
Honeycomb louvre	204091
Barndoors black	204092

VINCI L PRO

Description	Reflector	CCT (K)	CRI	Load	Lumen	Load	Lumen	Lm/W	○ White	● Black																																																						
						LIGHTSOURCE			LUMINAIRE			ART. No.																																																				
WARM WHITE 3000K (930)																																																																
Vinci L Pro 5000lm SP 930	Spot 14°	3000K	92	42W	5360	47W	4715	100	2040210	2040214																																																						
Vinci L Pro 5000lm ME 930	Medium 26°	3000K	92	42W	5360	47W	4715	100	2040211	2040215																																																						
Vinci L Pro 5000lm FL 930	Flood 40°	3000K	92	42W	5360	47W	4715	100	2040212	2040216																																																						
<table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,26</td> <td>37222</td> <td>1</td> <td>0,46</td> <td>16467</td> <td>1</td> <td>0,67</td> <td>9135</td> </tr> <tr> <td>2</td> <td>0,51</td> <td>9306</td> <td>2</td> <td>0,92</td> <td>4117</td> <td>2</td> <td>1,35</td> <td>2284</td> </tr> <tr> <td>3</td> <td>0,77</td> <td>4136</td> <td>3</td> <td>1,39</td> <td>1830</td> <td>3</td> <td>2,02</td> <td>1015</td> </tr> <tr> <td>4</td> <td>1,02</td> <td>2326</td> <td>4</td> <td>1,86</td> <td>1029</td> <td>4</td> <td>2,70</td> <td>571</td> </tr> </tbody> </table>						Spot 14°			Medium 26°			Flood 40°			m	∅	Lux	m	∅	Lux	m	∅	Lux	1	0,26	37222	1	0,46	16467	1	0,67	9135	2	0,51	9306	2	0,92	4117	2	1,35	2284	3	0,77	4136	3	1,39	1830	3	2,02	1015	4	1,02	2326	4	1,86	1029	4	2,70	571	<p>3000K 930 Spectral power distributions</p>				
Spot 14°			Medium 26°			Flood 40°																																																										
m	∅	Lux	m	∅	Lux	m	∅	Lux																																																								
1	0,26	37222	1	0,46	16467	1	0,67	9135																																																								
2	0,51	9306	2	0,92	4117	2	1,35	2284																																																								
3	0,77	4136	3	1,39	1830	3	2,02	1015																																																								
4	1,02	2326	4	1,86	1029	4	2,70	571																																																								
NEUTRAL WHITE 4000K (940)																																																																
Vinci L Pro 5000lm SP 940	Spot 14°	4000K	92	42W	5780	47W	5080	107	2040250	2040254																																																						
Vinci L Pro 5000lm ME 940	Medium 26°	4000K	92	42W	5780	47W	5080	107	2040251	2040255																																																						
Vinci L Pro 5000lm FL 940	Flood 40°	4000K	92	42W	5780	47W	5080	107	2040252	2040256																																																						
<table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,26</td> <td>40128</td> <td>1</td> <td>0,46</td> <td>17745</td> <td>1</td> <td>0,67</td> <td>9851</td> </tr> <tr> <td>2</td> <td>0,51</td> <td>10032</td> <td>2</td> <td>0,92</td> <td>4436</td> <td>2</td> <td>1,35</td> <td>2463</td> </tr> <tr> <td>3</td> <td>0,77</td> <td>4459</td> <td>3</td> <td>1,39</td> <td>1972</td> <td>3</td> <td>2,02</td> <td>1095</td> </tr> <tr> <td>4</td> <td>1,02</td> <td>2508</td> <td>4</td> <td>1,86</td> <td>1109</td> <td>4</td> <td>2,70</td> <td>616</td> </tr> </tbody> </table>						Spot 14°			Medium 26°			Flood 40°			m	∅	Lux	m	∅	Lux	m	∅	Lux	1	0,26	40128	1	0,46	17745	1	0,67	9851	2	0,51	10032	2	0,92	4436	2	1,35	2463	3	0,77	4459	3	1,39	1972	3	2,02	1095	4	1,02	2508	4	1,86	1109	4	2,70	616	<p>4000K 940 Spectral power distributions</p>				
Spot 14°			Medium 26°			Flood 40°																																																										
m	∅	Lux	m	∅	Lux	m	∅	Lux																																																								
1	0,26	40128	1	0,46	17745	1	0,67	9851																																																								
2	0,51	10032	2	0,92	4436	2	1,35	2463																																																								
3	0,77	4459	3	1,39	1972	3	2,02	1095																																																								
4	1,02	2508	4	1,86	1109	4	2,70	616																																																								

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%.
Tolerance of color temperature: +/-150 K. Values apply to an ambient temperature of 25°C.